


TROPITONE®

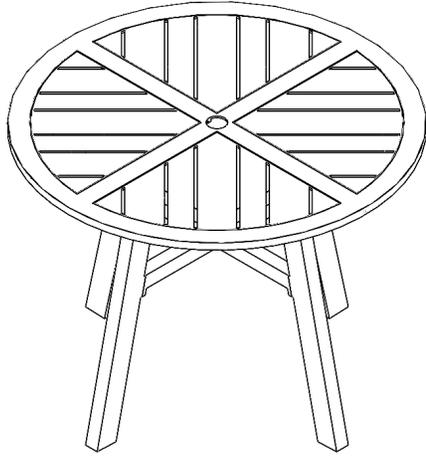

MORE INFORMATION

For care and cleaning instructions, refer to the Tropitone® Care, Maintenance, Safety & Warranty Information guide included with your furniture and available at www.tropitone.com/warranty.

Additional care information, “How To” videos and assembly instructions for Tropitone Outdoor Furniture and Basta Sole shade products are also available at our website.

If you have difficulty understanding any of the instructions and need assistance while assembling your Crestwood KD Tables, please call Tropitone’s Customer Service Center at 949-951-2010.

Tropitone Furniture Co., Inc.
5 Marconi, Irvine, CA 92618

949 951 2010 phone
www.tropitone.com



Part # R9T00063
Revised: 02.27.2023
2023 Tropitone Furniture Co., Inc.

TROPITONE®

*Assembled furniture
is heavy. Assemble
at place of use.*

Crestwood Round KD Tables Assembly Instructions

Congratulations on the purchase of your Tropitone® Crestwood KD Table. Read through all steps before fastening components together.

CAUTION: Do not try to lift or flip furniture components with only one person. Components may be heavy and awkward to handle, and may result in injury to persons or damage to property if not lifted properly. Once the Table Top has been installed, use 2 persons to turn the assembled table over to an upright position.


Tools Required

Safety Glasses

7/16” Hex Head Socket Wrench

Parts List

- (4) Legs
- (1) Table Top
- (1) Center Brace
- (8) 1/4-20 X 1” Hex Bolt
- (8) 1/4” Lock Washers
- (8) 1/4” Flat Washers





✓ Check that all items listed in the Parts List are in your carton.

Prepare a smooth, non-scratch work surface (shipping carton, a tarp or pool towels can be used).

Base Assembly

Loosely attach each leg with one **(A)** bolt, one flat washer, and one lock washer. Do not fully tighten at this point.

Repeat process until all four legs are loosely attached to the Cross Brace

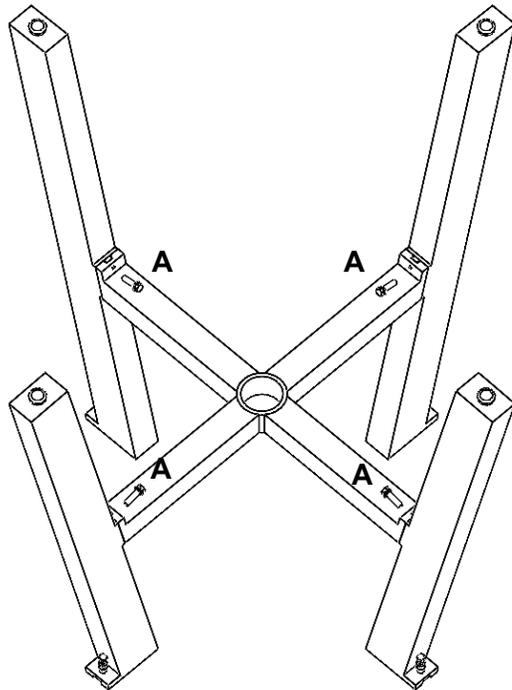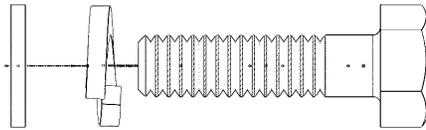


2

Table Top Assembly

Place Table Top upside down on the prepared work surface. Mounting Pads should be facing upwards.


With the Cross Brace attached, place the four legs onto the four corner mounting posts of the Table Top.

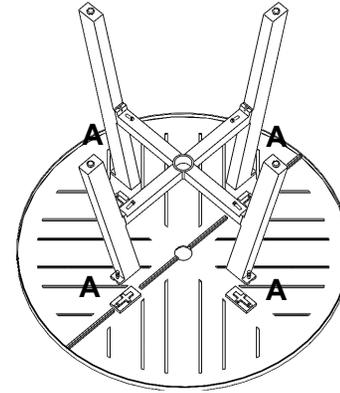

Loosely attach each leg with One **(A)** bolt and two washers. Do not fully tighten until all four legs are attached.

Fully tighten all bolts.

Check 8 bolts to ensure that all are fully tightened.

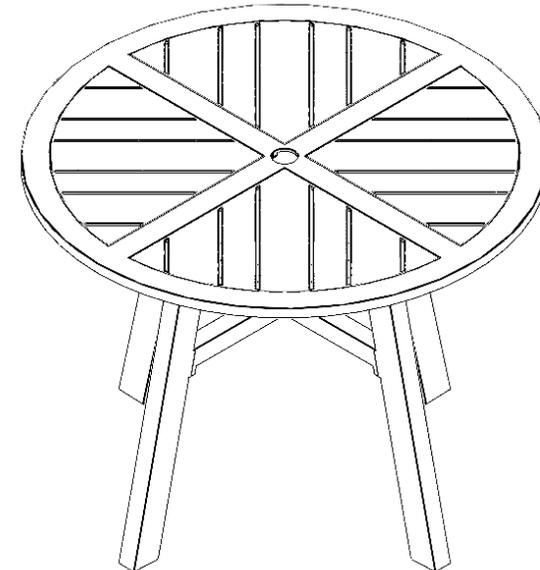

3